

SUN COOL
FABRICS




BLINDS CALIFORNIA

OMEGA 1%

OPENNESS FACTOR 1%
SCREEN FABRIC

Omega is a popular fabric known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.




ROLLER
SHADES




ROMAN
SHADES



PANEL
TRACKS




SKYLIGHT
TRACKS

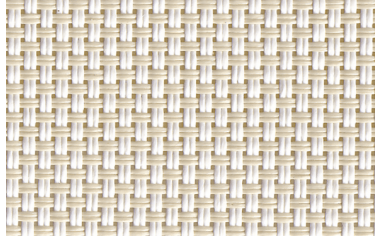


WHITE/LINEN

SC-A2-102

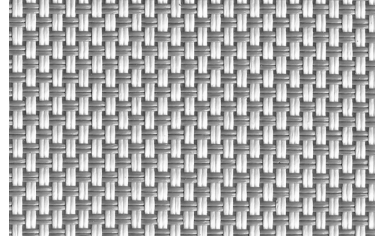


WHITE/GRAY

SC-A2-103

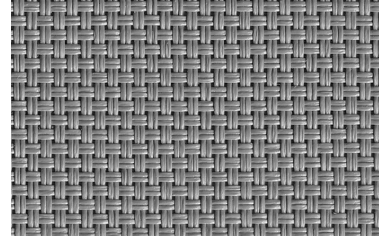


GRAY/GRAY

SC-A2-106

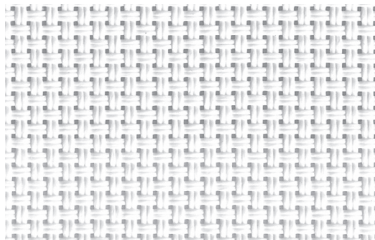


WHITE/WHITE

SC-A2-101

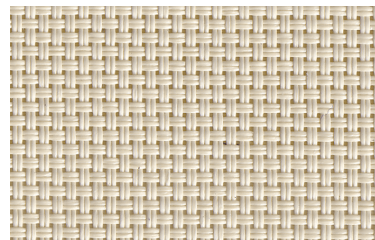


TAN/TAN

SC-A2-104

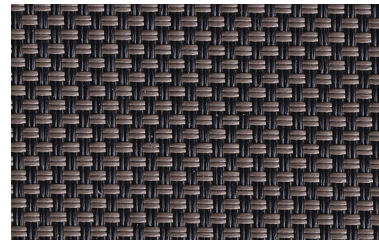


BLACK/BRONZE

SC-A2-108

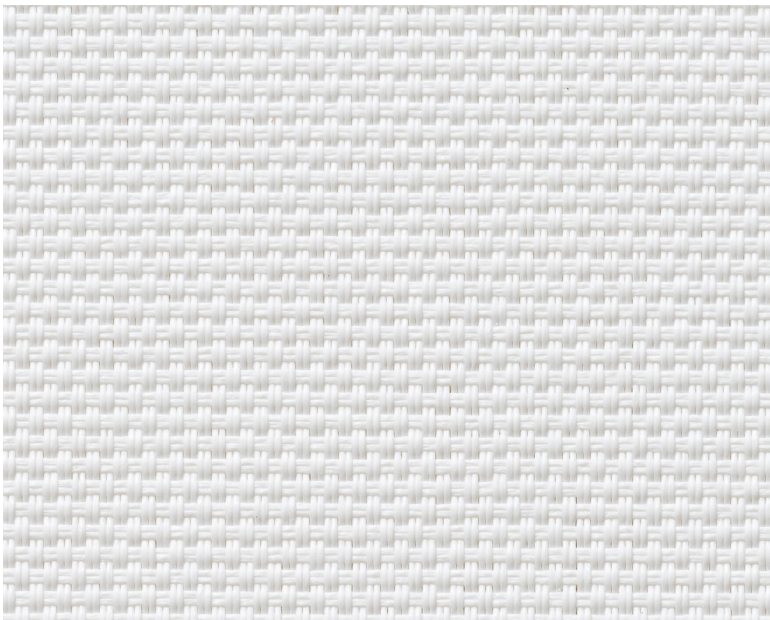

BRIGHT WHITE

SC-A2-100

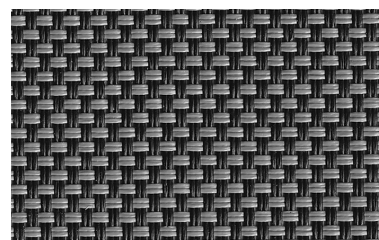

BLACK/GRAY

SC-A2-110



BLACK/BLACK

SC-A2-111

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	98" / 118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	13.84 oz/yd ²
THICKNESS	.030" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	64*40
BREAKING STRENGTH	Warp 2060 N/5cm Weft 1300 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19 FLAME RETARDANT	OEKO-TEX® STANDARD 100 FREE OF HARMFUL CHEMICALS	UL GREENGUARD GOLD HEALTHY INDOOR AIR QUALITY	ROHS COMPLIANT FREE OF HARMFUL METALS	10 YEAR WARRANTY QUALITY GUARANTEED	ASTM G-21 & E-2180 BACTERIA & FUNGAL RESISTANCE	NFPA® 701-TM FIRE RETARDANT
--	---	--	--	--	--	--