

SUN COOI
FABRICS



BLINDS CALIFORNIA


BROMUS

OPENNESS FACTOR 5%
SCREEN FABRIC
DECORATIVE

Bromus features multi-colored yarns of linens, grays, and browns to provide the appearance of texture within a beautiful, natural-looking fabric.




ROLLER
SHADES



ROMAN
SHADES



PANEL
TRACKS




SKYLIGHT
TRACKS




DARK BROWN

SC-L1-507

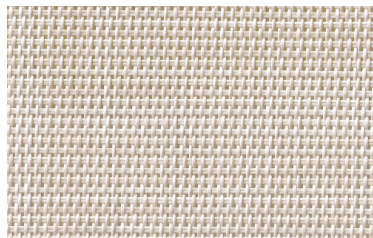


BEIGE

SC-L1-501

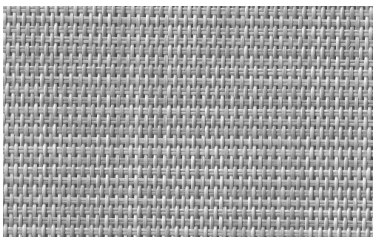


LIGHT GRAY

SC-L1-502

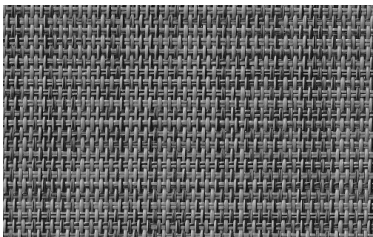


DARK GRAY

SC-L1-503

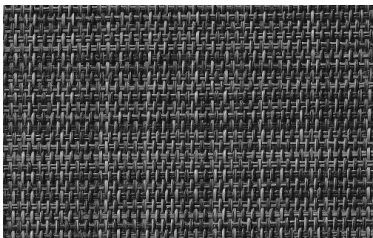

BLACK

SC-L1-504

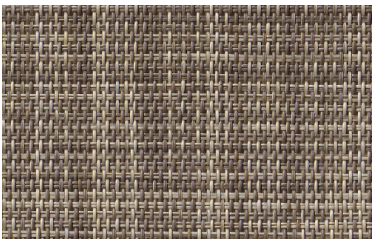

BROWN

SC-L1-507

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	12.61 oz/yd ²
THICKNESS	.029" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	48*46
BREAKING STRENGTH	Warp 1600 N/5cm Weft 1500 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19 FLAME RETARDANT	OEKO-TEX® STANDARD 100 FREE OF HARMFUL CHEMICALS	UL GREENGUARD GOLD HEALTHY INDOOR AIR QUALITY	ROHS COMPLIANT FREE OF HARMFUL METALS	10 YEAR WARRANTY QUALITY GUARANTEED	ASTM G-21 & E-2180 BACTERIA & FUNGAL RESISTANCE	NFPA® 701-TM FIRE RETARDANT
---	--	---	---	---	---	---