

SUN COOL
FABRICS




F SCREEN 90

OPENNESS FACTOR 3%
SCREEN FABRIC



F Screen 90 provides the best combined performance of view through and solar control due to its symmetric basketweave structure, strong, fiberglass core yarn structure, and two available openness factors. It is an optimal choice for any installation, residential, or commercial.




ROLLER
SHADES




ROMAN
SHADES



PANEL
TRACKS




SKYLIGHT
TRACKS

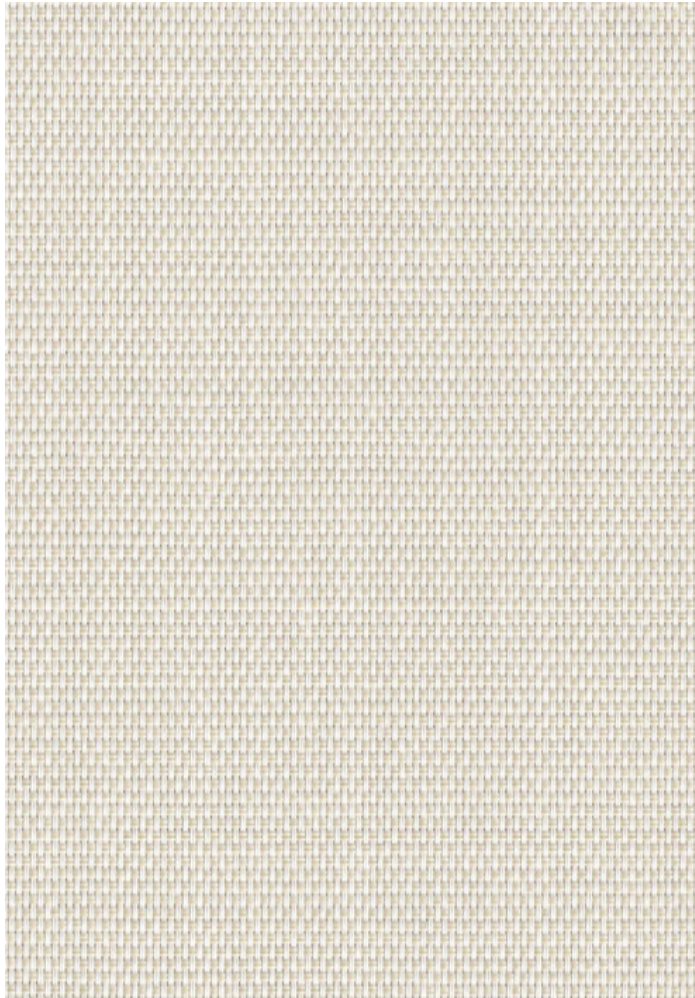


WHITE/LINEN

SC-F2-302

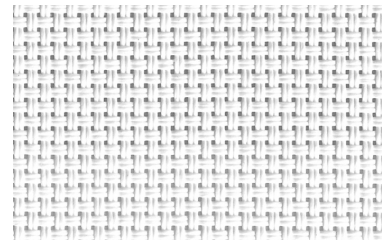

WHITE/WHITE

SC-F2-301

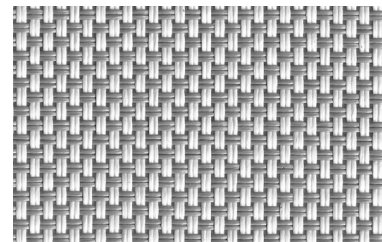

WHITE/GRAY

SC-F2-303



FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser
Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	(3%) 12.87 oz/yd ²
THICKNESS	.020" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	52*44
BREAKING STRENGTH	(3%) Warp 1800 N/5cm (3%) Weft 1800 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19 FLAME RETARDANT	OEKO-TEX® STANDARD 100 FREE OF HARMFUL CHEMICALS	UL GREENGUARD GOLD HEALTHY INDOOR AIR QUALITY	ROHS COMPLIANT FREE OF HARMFUL METALS	10 YEAR WARRANTY QUALITY GUARANTEED	ASTM G-21 & E-2180 BACTERIA & FUNGAL RESISTANCE	NFPA® 701-TM FIRE RETARDANT
---	--	---	---	---	---	---